


RUBBERWORX

PVC WATER SUCTION AND DISCHARGE LOW TEMP

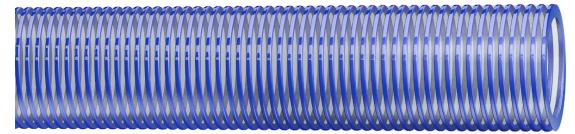

This medium-duty low temperature water suction and discharge hose is designed for use in construction, dewatering, agricultural and industrial applications. PVC tube designed to handle residual chemicals in water transfer applications.

TUBE:	PVC
REINFORCEMENT:	WHITE PVC HELIX
COVER:	PVC
TEMPERATURE:	-40°F to 150°F
BRANDING:	PVC SUCTION AND DISCHARGE 100 PSI
PACKAGING SPECIFICATIONS:	100' COILS AND 20' SECTIONS

SA #	ID (IN)	OD (IN)	WP (PSI)	BURST (PSI)	BEND RADIUS (IN)	VACUUM RATING (HG)	WEIGHT	PACKAGING
1024106-100	1.00	1.25	65	195	3	29	0.22	20', 100'
1024106-125	1.25	1.56	65	195	4	29	0.36	20', 100'
1024106-150	1.50	1.77	65	195	5	29	0.45	20', 100'
1024106-200	2.00	2.36	65	195	7	29	0.62	20', 100'
1024106-250	2.50	2.90	50	150	8	29	0.87	20', 100'
1024106-300	3.00	3.42	45	135	10	29	1.20	20', 100'
1024106-400	4.00	4.50	40	120	15	29	1.83	20', 100'
1024106-500	5.00	5.59	30	90	25	29	2.42	20', 100'
1024106-600	6.00	6.70	25	75	30	29	3.36	20', 100'